

## DELIVERING A **PERFECTLY MOWED** GREEN **EVERY TIME.**

At the heart of every Baroness reelmower is the cutting cylinder and bedknife.

Every cutting cylinder is individually balanced before being installed, and our heat treatment process ensures that the cutting edges of both our cutting cylinders and bedknives stay sharp and true.

No-one takes more care than Baroness.





As well as optimising the LM315 for diesel engine power, we took the time to make sure that operator comfort was fully addressed too.

An adjustable steering column and seat, together with comfort seat options, makes the Baroness LM315 a joy to work on.



For more than 20 years, Baroness has been pioneering its very own hybrid drive. We minimise damaging oil leaks using tried and trusted technology.

Our unique cutting unit cable drive system has been tried and tested over many seasons of use and is a reliable low-cost and low-maintenance alternative.



Available in 7, 9 or 11-blade reel options, with bedknife options from 1.5mm to 5mm thickness, we can offer cutting units for all greens, tees and approach mowing needs.

Cable drive to the cutting units eliminates potential hydraulic oil leaks where they occur most.



The Baroness LM315 has been designed to get you to every corner of the golf course. It's equally at home on tees, approaches or greens.

Moving around the golf course, you need to know that the cutting units will stay clear of any obstructions as you travel. That's why we designed in a hi-lift feature to ensure maximum protection for the cutting units during transport.





The LM315 cutting unit can be removed in seconds - no tools needed!

- 1. Unclip the drive cable
- 2. Unclip the ball joint
- 3. Slide out the cutting unit





The Baroness LM315 is not just the finest of reelmowers; it's also a maintenance system!

The cutting units can be fitted with grooming, de-thatching and brush reels which can be run either in the same direction of rotation as the cutting cylinder or in the opposing direction, thanks to the unique gear drive setup.












## LM315GC SPECIFICATIONS



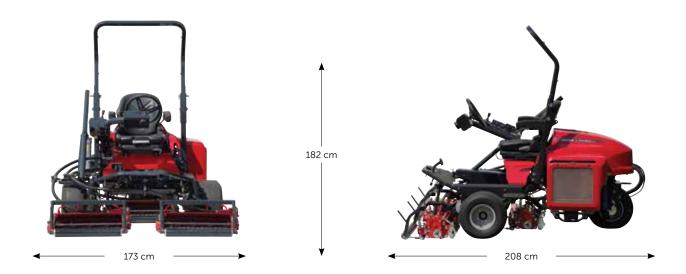

## LM315GC

Length	208 cm
Width	173 cm
Height (to steering wheel)	135 cm
Height (including ROPS)	182 cm
Wheelbase	126 cm
Wheel track - front	126 cm
Weight (Incl all fluids, 3WD and grooming reels fitted)	680 kg
No. of cutting units	3
Cutting unit width	56 cm
Mowing width	152 cm
Mowing height	2 - 29 mm
Drive type	Hydrostatic 2WD
Drive option	3WD

Steering	Hyd. Power steering
Engine	Kubota D722, 21hp 3-cylinder
Speed - transport	15 km/h 2WD, 9km/h 3WD
Speed - cutting	Max. 6km/h
Cuts per metre (High setting)	246 @ 5 km/h (11-blade unit)
Cuts per metre (Low setting)	160 @ 5 km/h (11-blade unit)
Reel drive	Electric clutch and cable
Fuel Tank capacity	20 litres
Hyd. Oil tank capacity	16 litres
Tyre size - front	18 x 9.50 - 8
Tyre size - rear	18 x 9.50 - 8

Specifications may be subject to change without notice.

25 - 29 Permas Way, Truganina, Victoria, 3029 Australia Freecall: 1800 334 653 E: sales@kubota.com.au W: kubota.com.au

15A Bennet Street, Cloverlea, Palmerston North, 4412 Freecall: 0800 582 682 E: sales@kubota.co.nz W: kubota.co.nz